



MULTIPLE RF LIGHTING PROTECTION

Rover RF
LIGHTING
PROTECTION

mod. **RLP-XX**



LIGHTING PROTECTION PANEL FOR UP TO 12 L-BAND SIGNALS FEEDS

- 1 U 19" RACK MOUNTABLE PANEL
 - "F" 75 Ω INPUT AND OUTPUT
 - HIGH TEMPERATURE RANGE
- DC VOLTAGE TRANSITE FOR LNB POWER SUPPLYING
- HIGH INGRESS PROTECTION RATING
- EASY EXCHANGEABLE SURGE SUPPRESSORS

**INNOVATIVE
PERFORMANCE**

for SYSTEM INTEGRATOR, TELEPORT
BROADCASTER, CABLE NETWORK
GOVERNMENT & MILITARY
COMMUNICATIONS



1972 > 2018 >>

46 YEARS OF INNOVATION



TECHNICAL SPECIFICATIONS


RF Specifications

- *Frequency range:* 250-2350 MHz
- *Number of input/output ports (xx):* up to 12
- *Impedance, connectors:* "F" 75 Ohm
- *Return loss:* > 14 dB, typ. 16 dB
- *Insertion loss:* < 0.3 dB
- *CW power:* < 60 W
- *Discharge current:* 500 x 100 A ((10/1000 µs)
1 x 20 kA; 10 x 15 kA (8/20 µs)
- *Mating face:* acc. IEC 61169-24
- *Mating cycles:* > 500

General Specifications

- *Grounding bolt:* thread M6 x 25 mm
- *Size:* width: 19"
height: 1 RU
depth: 80 mm
- *Weight:* ± 4 Kg
- *Operating temperature:* from - 40° to 100 °C
- *Ingress protection rating:* IP65 (IEC 60529) Telecom compliant


ORDERING CODE DEFINITION

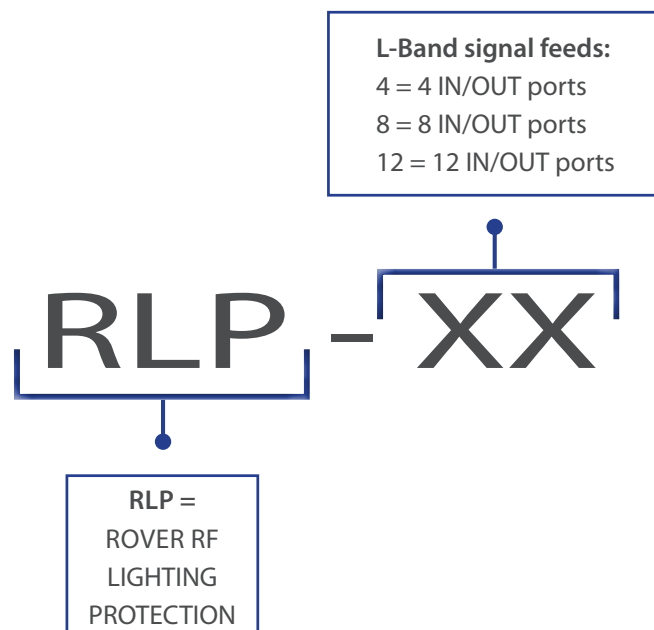

V.1 25-1-18



Product
made in Italy by
Rover Broadcast.com



Specifications and features are subject to change without notice.
RO.VE.R. Laboratories S.p.A.
Via Parini, 2 - 25019 Sirmione (BS) Italy
info@roverinstruments.com • www.roverbroadcast.com